
TYPE "2" DRIVEWAY

NO SCALE

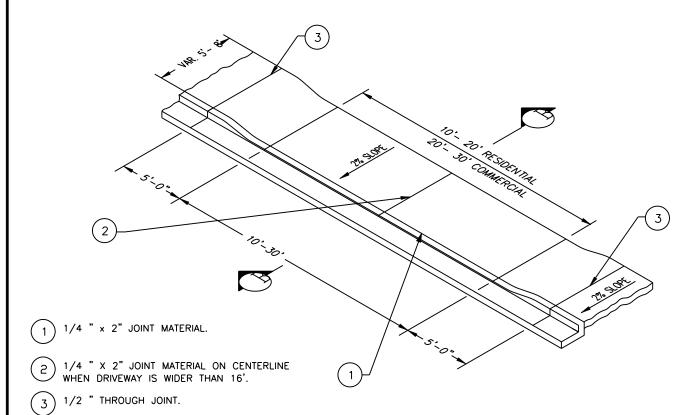

- DRIVEWAY SURFACE SHALL RECEIVE A LIGHT BRUSH FINISH TRANSVERSE TO THE VEHICLE FLOW.
- 4"X4" NO. 4 GAGE
 WELDED WIRE MESH
 REQUIRED FOR
 COMMERCIAL DRIVEWAYS.
 PER AASHTO M55

NOTES:

- WHERE DRIVEWAY EXCEEDS 16' IN WIDTH, A 1/4" EXPANSION JOINT SHALL BE PLACED LONGITUDINALLY ALONG CENTERLINE.
- 2. DRIVEWAY TYPE "2" TO USED WHERE ADJOINING PROPERTY IS LOWER THAN SIDEWALK GRADE, AND SHALL BE APPROVED BY THE CITY.

T' RAD. STANDARD SIDEWALK SECTION 2% SLOPE 6" DRIVEWAY FOR RESIDENTIAL 9" DRIVEWAY FOR COMMERCIAL CONCRETE CURB AND GUTTER COMPACTED SUB GRADE

SECTION B-B

APPROVED: RICHARD H. BARTHOL

ENGINEERING DIVISION

REV. DATE:

JULY 1, 2000

1 CAMPAGE 09-08-1998



STANDARD DETAILS

TYPE "2" DRIVEWAY

FILE SD306.DWG DRAWING NO. 306